


	<b>DATA SHEET</b>	
Valid from: 28-01-2019	<b>FLEXIMARK® SMC/SM marking blank</b>	

Industrial system for marking cables, pipes, components and devices.  
Used in demanding and aggressive environment.  
Can be mounted directly on the cable together with FLEXIMARK® Stainless steel cable ties.  
Delivered as blank markers in one package unit.



### Technical data

Material:	Stainless steel according to EN 1.4404 (SS2348, AISI-316L)
Resistance:	High acid, UV, diesel, water, alkali and oil resistance
Operating temperature:	<500°C
Approvals:	Achilles, High chemical resistance (SP Tested by an independent expert)

### Mounting:

For maximum adhesive, leave label in place for at least 24h.

### Other product data:



### Advantages:

High quality and durability of the marking due to material stainless steel (SS2348, AISI-316L).  
Marking suitable for demanding and aggressive environment.  
Can be used for both component and cable marking.  
High resistance towards different strains and chemicals.  
Possibility to emboss your own marking with a manual embossing machine.  
FLEXIMARK® Cable ties available in the assortment with the same durable material: stainless steel (SS2348, AISI-316L).

Creator: Fleximark/LR	Document: DB83251575EN FLEXIMARK Blank stainless Version: 02	Page 1 of 3
-----------------------	---	-------------

	<b>DATA SHEET</b>	
Valid from: 28-01-2019	<b>FLEXIMARK® SMC/SM marking blank</b>	

**Product data:**

Part no.	Article designation	Length x Width (mm)	Content (unit)	PU
83251575	FLEXIMARK® SMC Cable marker blank 75	75x11	50	1
83251576	FLEXIMARK® SMC Cable marker blank 110	110x11	50	1
83251580	FLEXIMARK® SM Component blank 75	75x11	50	1
83251585	FLEXIMARK® SMC Cable marker blank 102	102x11	200	1

**Resistance of FLEXIMARK® Stainless steel marking with embossing text**

(SP tested by an independent expert)

	UV resistance	Ageing resistance	Diesel resistance	Acid (H <sub>2</sub> SO <sub>4</sub> ) 25%	Alkali (Detergent solution, 10%)	Distilled water	Salt water (5% NaCl)	Transformer oil (Nytro 10X)	Ethanol
<i>Stainless steel SIS SS2348 (AISI316)</i>	Tested Recommended	Tested Recommended	Tested Recommended	Tested Recommended	Tested Recommended	Tested Recommended	Tested Recommended	Tested Recommended	Tested Recommended

**Testresult Acid proof cable sign (SP test):**


**Ageing 200h +90°C**


Function well. No cracks or other visible damages. The surface of the sign is apparently unchanged. The print is fully readable.

**Chemical resistance**


Function well. The print is fully readable.

Creator: Fleximark/LR	Document: DB83251575EN FLEXIMARK Blank stainless Version: 02	Page 2 of 3
-----------------------	---	-------------

	<b>DATA SHEET</b>	
Valid from: 28-01-2019	<b>FLEXIMARK® SMC/SM marking blank</b>	

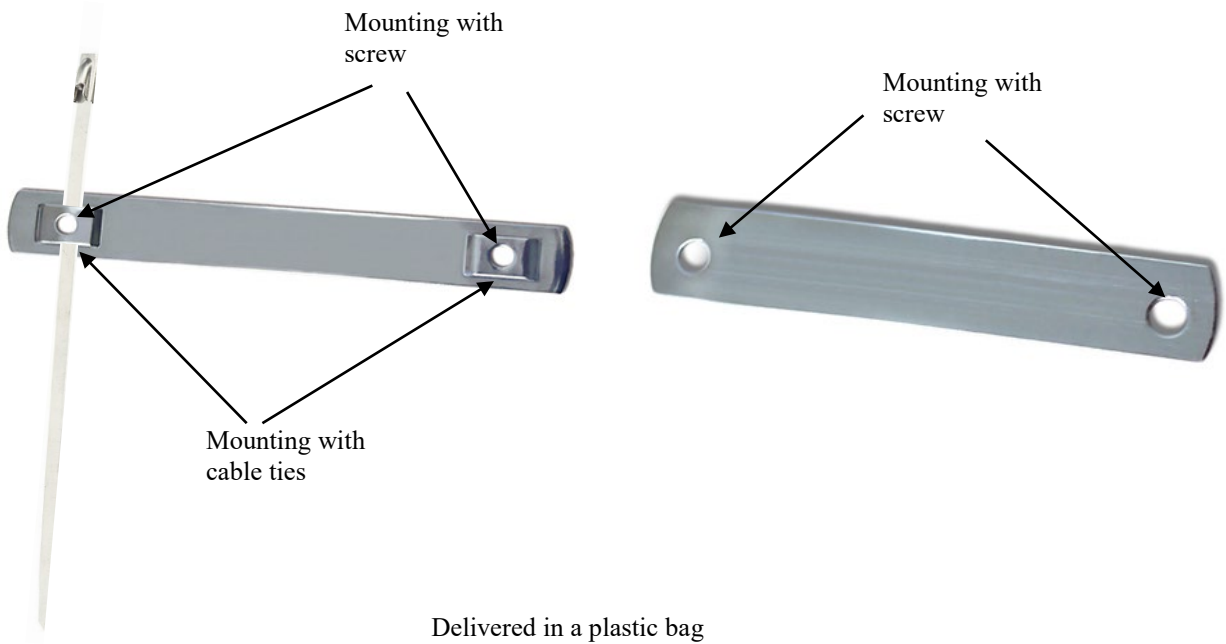

Delivered in a plastic bag

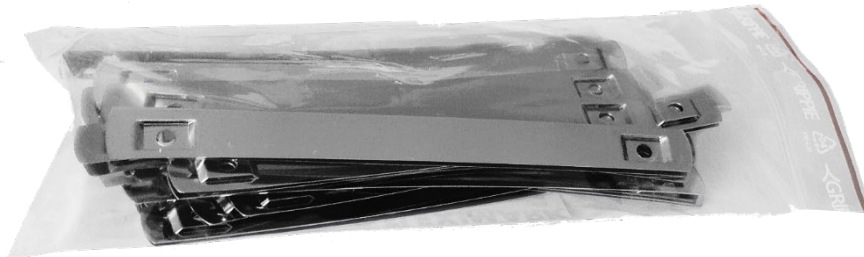

**Note:**

Pictures are not to scale and do not represent detailed images of each product.

Creator: Fleximark/LR	Document: DB83251575EN FLEXIMARK Blank stainless Version: 02	Page 3 of 3
-----------------------	---	-------------